


EAS Anti-theft Self Alarm Spider Wrap



Anti-theft self alarm spider wrap is an EAS tag with magnetic and alert frequency. It has four extendable and length adjustable security cables, suitable for all types of boxed merchandise. It will trigger the alarm as common tags when the spider tag is near the EAS system. Besides, it will also immediately alarm even not near the anti-theft system when the cables on the products is cut, as there is built-in button battery and mini alarm in this spider tag. With this self alarm spider tag, it can give dual or triple protection for your merchandise.

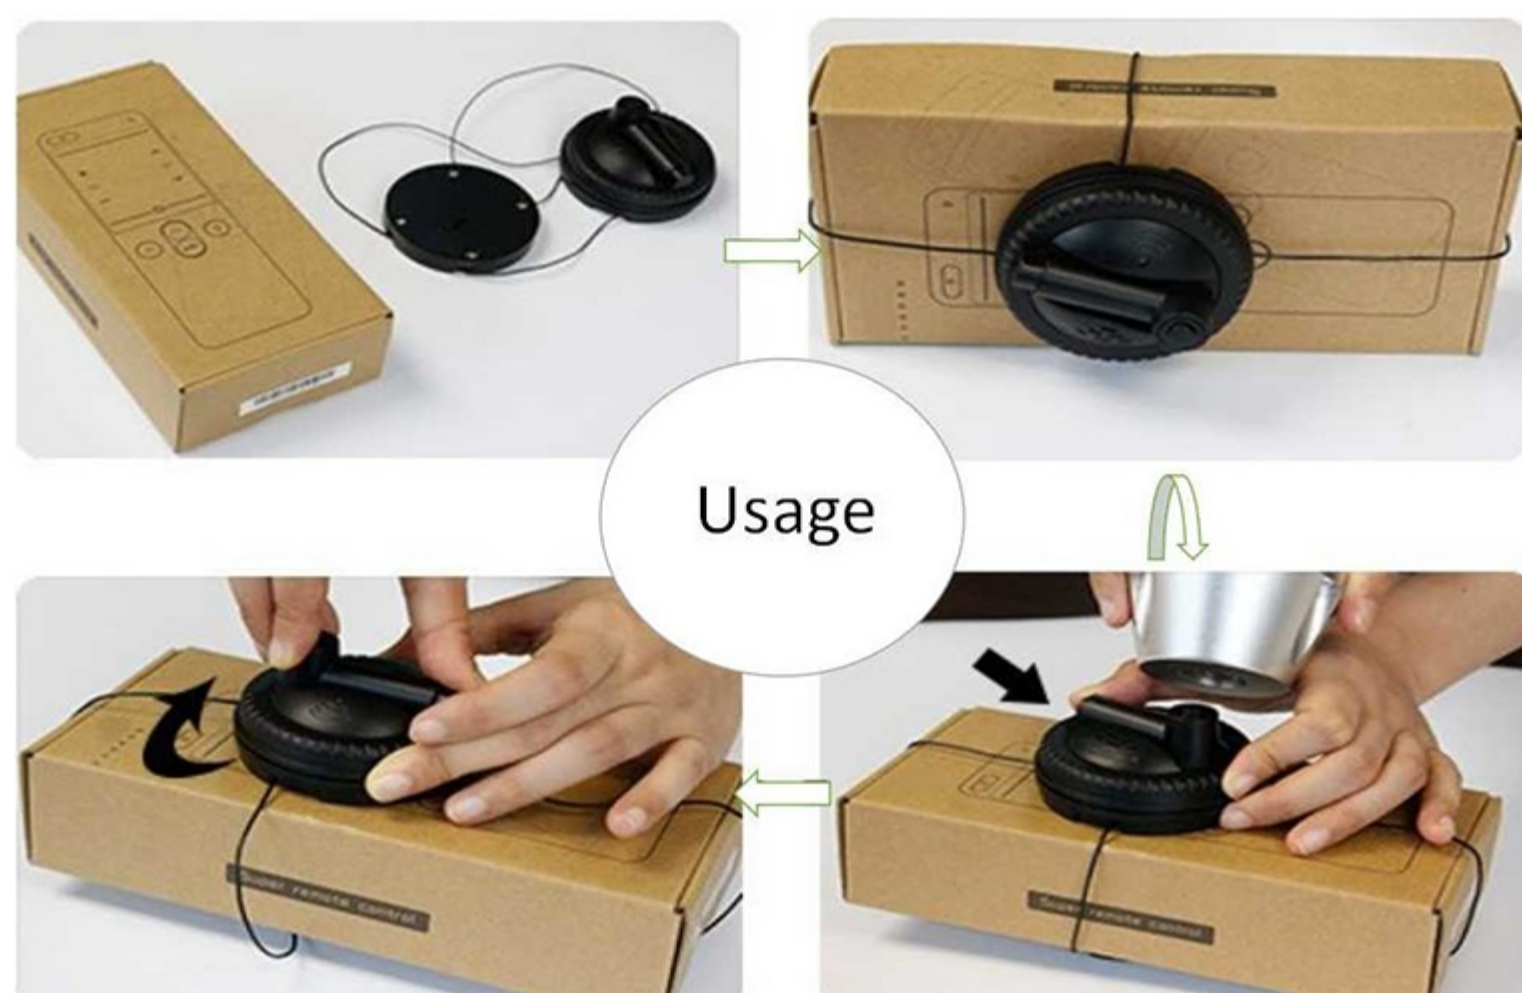

FEATURES

- Exquisite & elegant design.
- Super fast 5s cable winding up.
- Rugged enclosure against 1min knocking.
- High performance with lower power consumption.
- Extremely low probability of self-lock.

TECHNICAL SPECIFICATION

| |  |  |  |
|------------------------|---|---|---|
| Model | SW100 | SW200 | SW300 |
| Frequengy | 8.2mhz/58Khz | 8.2mhz/58Khz | 8.2mhz/58Khz |
| Spec | Dual alarm | Dual alarm | Dual alarm/Triple alarm |
| Dimension | 50*33mm | 70*33mm | 73*52mm |
| Color | Black or customized | Black or customized | Black or customized |
| Lock | Normal/Super | Normal/Super | Normal/Super |
| Cable length | 650mm or customized | 900mm or customized | 800mm or customized |
| Battery life | 3-5years | 3-5years | 3-5years |
| Consumption | 30mAh/Per year | 30mAh/Per year | 25mAh/Per year |
| Automatically disalarm | Stop alarming in 2h | Stop alarming in 2h | Stop alarming in 5min |
| Pulling force | ≥350N | ≥350N | ≥500N |
| Pressure force | ≥650N | ≥650N | ≥800N |
| Lanyard coat | Nylon | Nylon | Nylon |
| Instantaneous Force | 15KG | 15KG | 25KG |
| Buzzer db | 95db | 95db | 95db |
| Low battery reminder | Didi" sound remind | Didi" sound remind | LED flash |
| Package | 250pcs/carton 13.8kg | 100pcs/carton 9kg | 100pcs/carton 9kg |
| Detection distance | 1.5-1.7meter | 1.7-1.9meter | 1.7-1.9meter |

USER GUIDE

- After getting the spider tag, twist it in the opposite direction indicated by the arrow to release the protection cables.
- Put the goods in a mesh bag, and make four protection cables be evenly distributed around the goods.
- Tighten the protection cables in the direction indicated by the arrow (just fit the package), then press the button, and the label will start to work.
- After finishing the installation, the goods should be placed in the correct way to avoid damage to the goods, and achieve a good effect of protection.
- After customers purchase the goods, the clerk can use detacher and press the button again to open the spider tag, then it will stop working (if the goods is released by cutting the cables, an alarm will be triggered).



Dongguan Lifangmei Electronic Technology Co., Ltd

Email: sales@lifmei.com | Whatsapp: +8613688916156

Website: www.emenotec.com

Add:No.4, Industrial Road 2nd , Liyatang ,Tangxia Town, Dongguan, Guangdong